



Air/Fumes

A-FLEX SBR 20

Properties


- good economical solution
- customized branding on request.

Applications

- hose for general purpose compressed air applications as pneumatic tools and any other industrial applications
- water for washing operations in industrial maintenance

Construction

- inner tube: SBR, black, smooth
- reinforcement: synthetic textile.
- cover: SBR, black, smooth

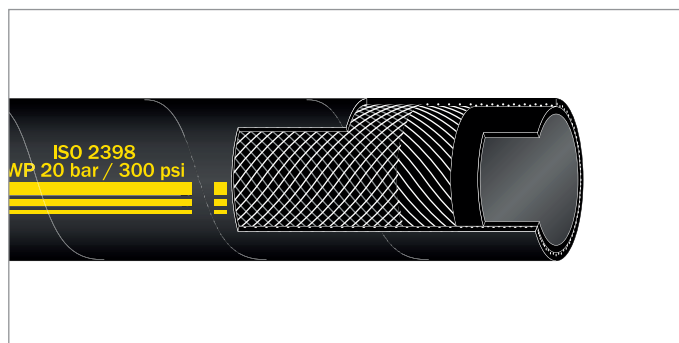

Code - A8G01....

Base Material - SBR

Operating Temperature - -30 ÷ +70 °C

Pressure - 20 bar

Vacuum - n.d.

Diameter Range - 6 ÷ 32 mm

Key Feature - Reinforced

inner Ø	wall thickness	outer Ø	working pressure	bursting pressure	weight	coil length
mm	mm	mm	bar	bar	kg/m	m
6,0	4,00	14,0	20	60	0,195	20/40
8,0	4,50	17,0	20	60	0,274	20/40
10,0	4,50	19,0	20	60	0,318	20/40
13,4	4,80	23,0	20	60	0,426	20/40
16,4	4,60	25,6	20	60	0,472	20/40
19,4	5,55	30,5	20	60	0,678	20/40
25,0	6,50	38,0	20	60	0,998	20/40
32,0	6,00	44,0	20	60	0,998	20/40

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - ott_17 rbd