




β-Joint series

Water, Sea water, Drain water, Cooling water

β-joint EP RED BAND

- Rubber expansion joint with **EPDM** inner and outer walls. EPDM guarantees an excellent resistance to oxidation, ozone, heat ageing, diluted acids, salts, bases and esters.
- This joints are suitable for hot and cold water flood, sea water, slightly acid, drain water, cooling water containing anticorrosive or antifreezing agents.

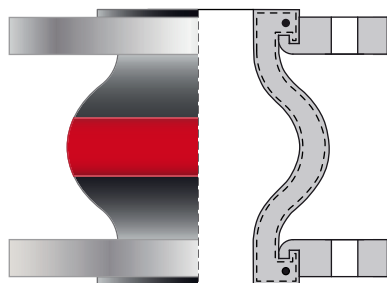

Code - B2G....

Liner - EPDM, ozone and heat resistant

Reinforcement - PA textile, spreaded Butyl

Cover - EPDM, ozone and heat resistant

Marking - Red band, DN... (inch), DN (mm)

Flanges - Swiveling, DIN PN 10/16, carbon steel, zinc plated

Working temperature - max +115 °C (240 °F)

Working pressure - 16 Atm (214 psi)

Vacuum resistance - 400 mmHg

						Flanges UNI 2223
DN	BL	L		L	α°	
NOMINAL DIAMETER	LENGTH	AXIAL		LATERAL	ANGULAR	PN
In"	mm	min	max	± mm	± α°	
1¼"	32	-30	+18	± 18	± 35	10 - 16
1½"	40	-30	+18	± 18	± 35	
2"	50	-30	+18	± 18	± 35	
2½"	65	-30	+18	± 18	± 30	
3"	80	-30	+18	± 18	± 30	
4"	100	-30	+18	± 18	± 25	
5"	125	-30	+18	± 18	± 25	
6"	150	-30	+18	± 18	± 15	
8"	200	-30	+18	± 18	± 15	
10"	250	-30	+18	± 18	± 10	
12"	300	-30	+18	± 18	± 10	

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • ott_18 rdb